

MASONLITE Cold Cathode Luminaries




Indirect Cove illuminations



MAXI 100MA Low Voltage Electronic
 (Size : 37mm Ht X 245mm L X 60mm W)
 0 ~ 10V Dimming
 max. 40 watts per mtr C-Cathode length
 (1 electronic transformer to beam up 2 lamps)

* Ceiling access NOT required.

Advantages : No flickering when switched ON, Clean and continuous light effect without dark spots, wide choice of colors including shades of white, can be shaped into any odd shapes & configurations, low consumption. Durable lighting system with optional Dimming (0-10V).

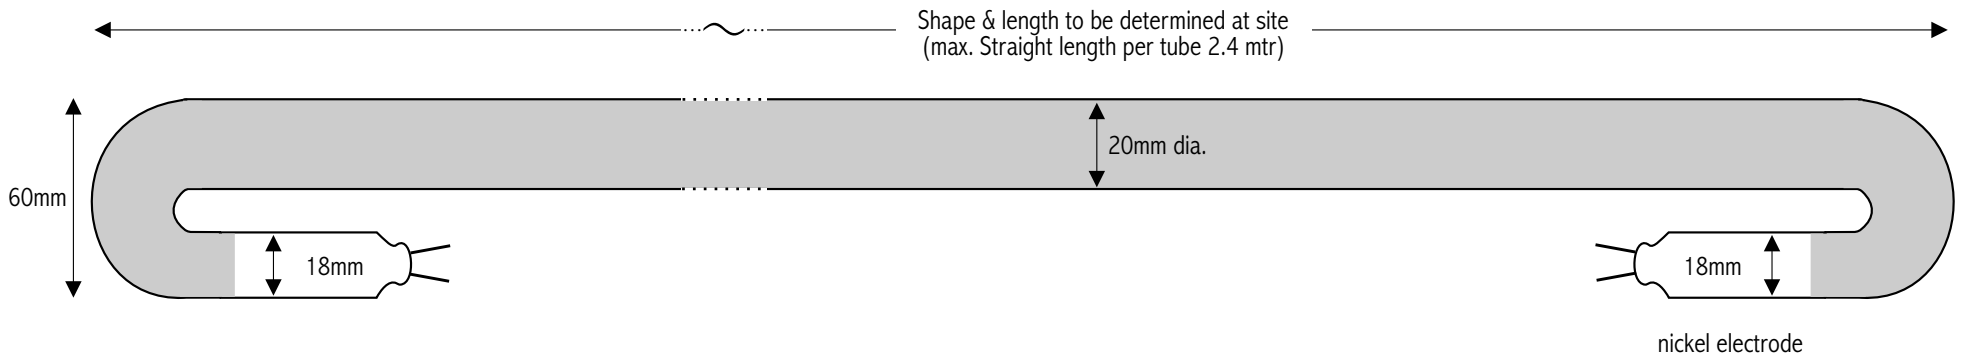

**TIME Luminaries
 sdn bhd**

#01-1B, Jln Hilir 1, Tmn Angsana Hilir
 55100 Kuala Lumpur, Malaysia
 Tel : 603-92829096 Fax : 603-92825875
<http://www.neon-lighting.com>

Cold Cathode Luminaire detail - L2 (low voltage)

Accessories : 100MA Low Voltage Electronic transformer,
 silicone HT cable (flame retardant) and silicone encapsulated
 electrodes.

Lamp size : 20mm diameter tubes with 18mm diameter nickel electrode
 Gas pressure 7mm/Hg. Color = masonlite WarmWhite 3000K (1250 Lumens per meter)