


# PC Clear Support (UV stabilised)

for Cold Cathode Lamps 20MM diameter

Fiber Optic Luminaire  
Masonlite Cold cathode


- 80MM is standard support height desirable to keep cold cathode lamps away from any metal contacts. (60MM is also available on request)
- For VERTICAL installation lamps there is tendency of lamps sliding down due to weight, strong winds, vibrations and gravity, 1mm insulated lead wire is recommended to fasten PVC lamp holder to lamps as extra hold .
- For CURVED lamps 3 or 4 lamp supports required to evenly balance and support cold cathode lamp
- For 2.4m LINEAR lamps 3 lamp supports required while short linear lamps require 2.

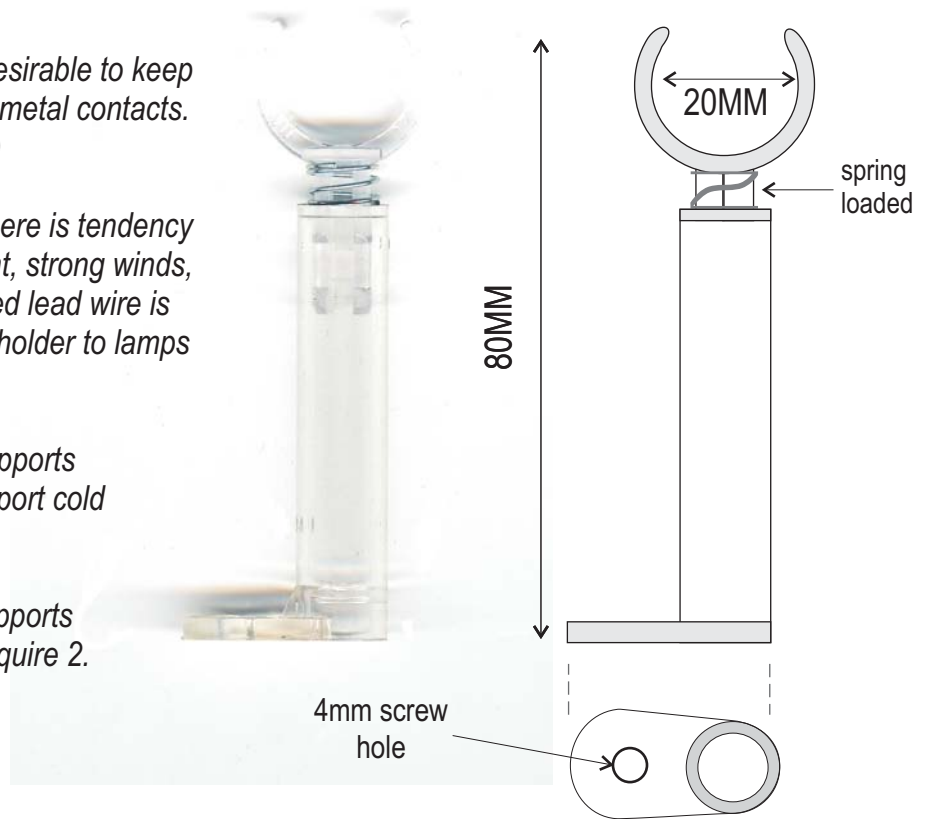


## short Linear lamps



## 2.4m Linear lamps



## Curved lamps

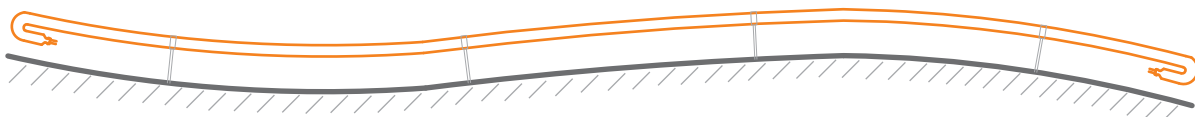

TiME Luminaries sdn bhd

Tel : +603-9282 9096 Fax : +603-9282 5875

<http://www.neon-lighting.com> <http://www.fiberlight.com.my> email : [sales@neon-lighting.com](mailto:sales@neon-lighting.com)

This catalogue cancels and replaces all previous catalogues of the same product ranges. TiME Luminaries Sdn Bhd reserves the right to make technical, formal or dimensional modification at any time, without prior notice obligation.

© Copyright Reserved No images, articles and illustrations in part or whole are allowed to be reproduced or duplicated in any form without written permission from TiME Luminaries Sdn Bhd.