



Incoming power feed must be minimum 1 amps per transformer

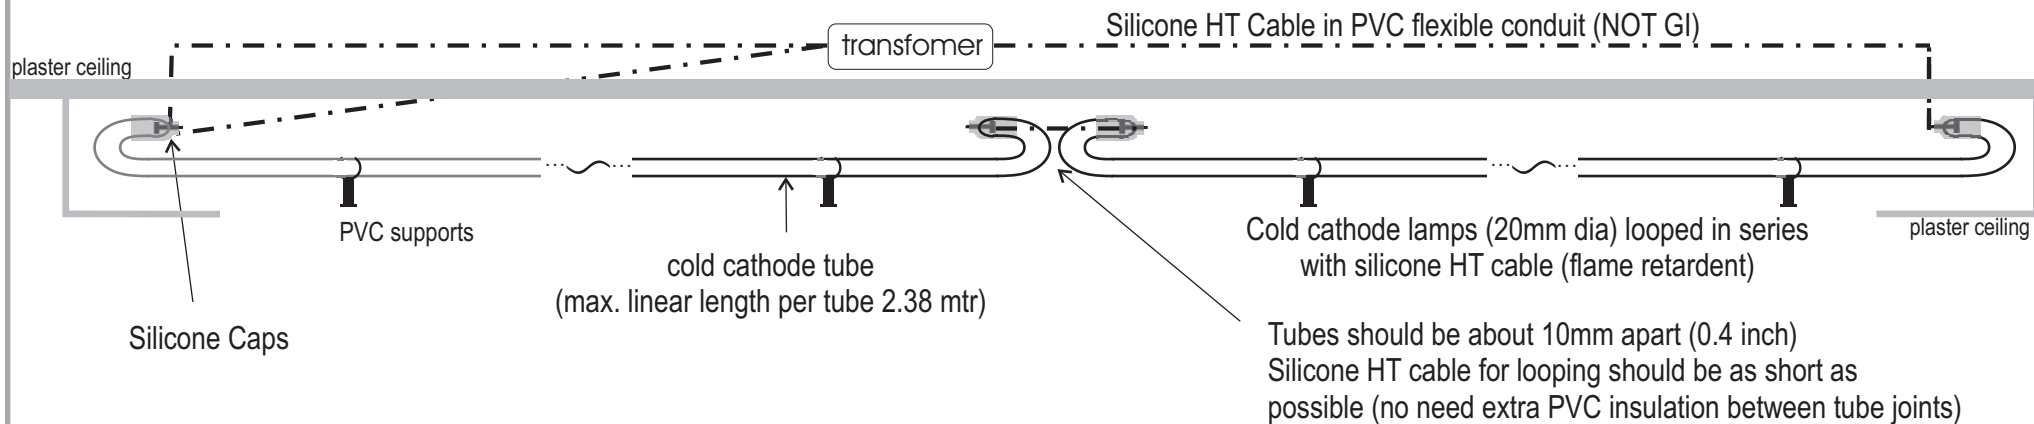

Typical Cove indirect cove illumination

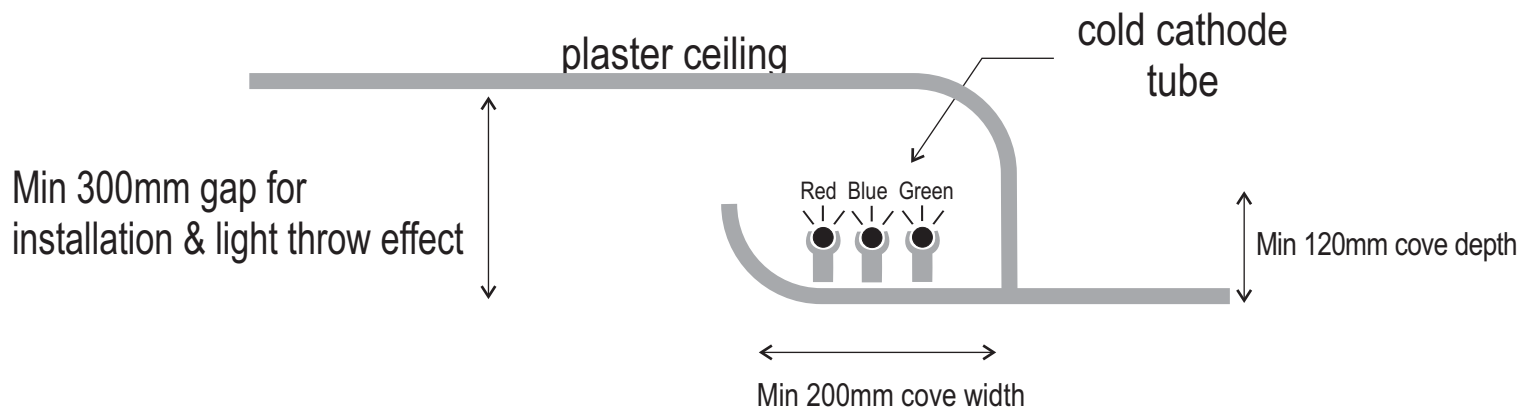

TIME Luminaries sdn bhd

#01-1B, Jln Hilir 1, Tmn Angsana Hilir
55100 Kuala Lumpur Malaysia
Tel : 603-92829096 Fax : 603-92825875
<http://www.neon-lighting.com>

Cold Cathode Cove detail with RGB color - L3

Accessories : 80MA electronic dimmable transformer (Italy), silicone HT cable (flame retardent) and safety electrode caps and Polaron UK color mixing control.

Lamp size : 20 mm diameter tubes with diameter nickel electrode
Gas pressure 7 mm/Hg. Tube colors : Argon Red, Brilliant Blue & Standard Green.