





-  150watt H.I.D Fiber Optic Luminaire™
-  Solid core fiber optic
- Recommended single loop return to one Luminaire 30 to 35 mtrs MAX.

Solid Core SIDE-Lit cable



11.0mm (O/D)
9.0mm (I/D)

Brighter than stranded cables.
Clear end point for high optical transmission.
Maximum temperature tolerance 100 C.
HDPE clear jacket for UV protection, algacide and fungicide treated exterior jacket for maximum durability and brilliance.

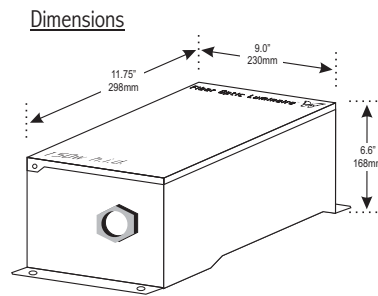


* Note : add an additional 3" (75mm) to length for optical port coupler

150W HID Luminaire



8-color dichroic disc
with single sparkle animation

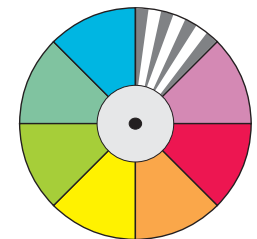

TIME Luminaries sdn bhd

#01-1B, Jln Hilir 1, Tmn Angsana Hilir
55100 Kuala Lumpur Malaysia
Tel : 603-92829096 Fax : 603-92825875
<http://www.fiberlight.com.my>

Side-lit Solid Core Fiber Optic Light for pools

Side Light Solid core Cable = 32m
Luminaire (light source) = 2 unit

Specification : Solid core side light cable (11mm dia with clear jacket) installed in U track, powered by 150watt H.I.D Fiber Optic Luminaire™ with 7+1 color dichroic, 4200K white beam, and T23 optical port.
Color synchronizer module required .

* designs dimensions are in proportion to scale

© copyright reserved