



Masonlite Cold Cathode™




Indirect Cove illuminations



MAXI 5050 (Italy) Electronic Transformer
 (Size : 46mm Ht X 178mm L X 59mm W)
 0 ~ 10V Dimming (Optional)
 20watts per mtr C-Cathode length

* Ceiling access NOT required.

Advantages : No flickering when switched ON, Clean and continuous light effect without dark spots, wide choice of colors including shades of white, can be shaped into any odd shapes & configurations, low consumption, Durable lighting system with optional Dimming (0-10V).

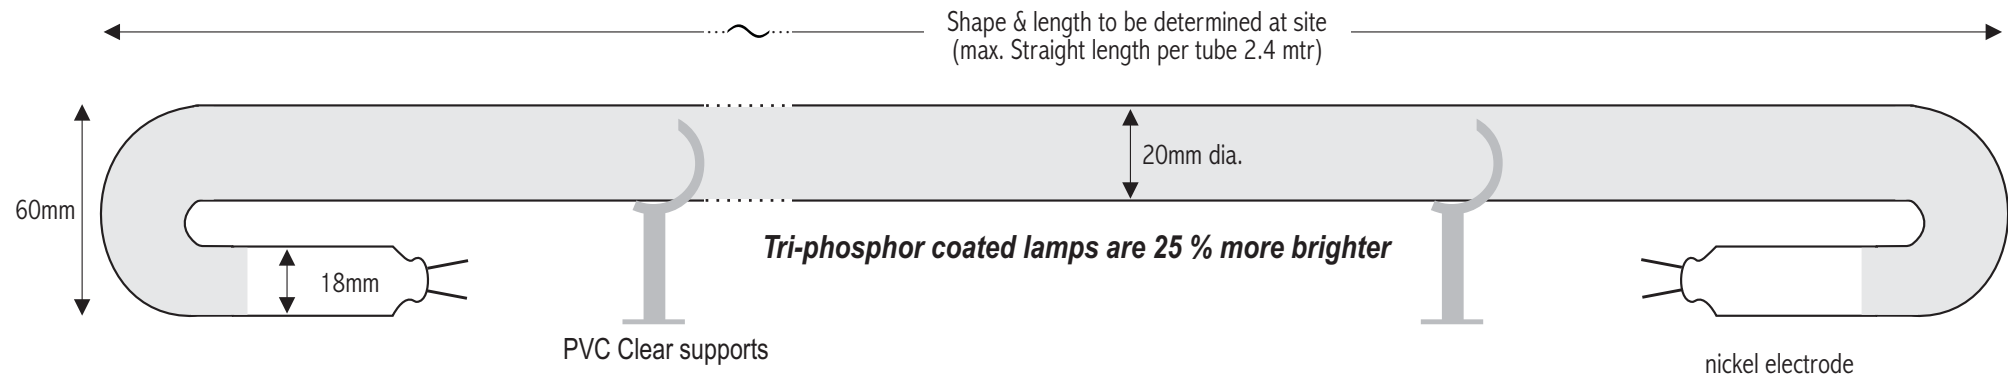

TIME Luminaries sdn bhd

#01-1B, Jln Hilir 1, Tmn Angsana Hilir
 55100 Kuala Lumpur Malaysia
 Tel : +603-92829096 Fax : +603-92825875
<http://www.neon-lighting.com>

Cold Cathode Luminaire detail - L2 (electronic)

Accessories : 50ma transformer MAXI (Italy), silicone HT cable (flame retardant) and silicone encapsulated electrodes.

Lamp size : 20mm diameter tubes with 18mm diameter nickel electrode
 Gas pressure 7mm/Hg. Color = Softlite 2700K (1250 Lumens per meter)
 * denotes tri-phosphorus coated lamps with 25% higher output and better color rendering