

MASONLITE (UK) tubes & electrodes

Indirect Cove illuminations

MAXI 2.5kv~100MA (Italy) Electronic Transformer

(Size : 46mm Ht X 178mm L X 59mm W)


1 ~10V Dimming (Optional)

22watts per mtr C-Cathode length

* Ceiling access NOT required.

Advantages : No flickering when switched ON, Clean and continuous light effect without dark spots, wide choice of colors including shades of white, can be shaped into any odd shapes & configurations, low consumption, Durable lighting system with optional Dimming (0-10V).

Shape & length to be determined at site
(max. Straight length per tube 2.4 mtr)

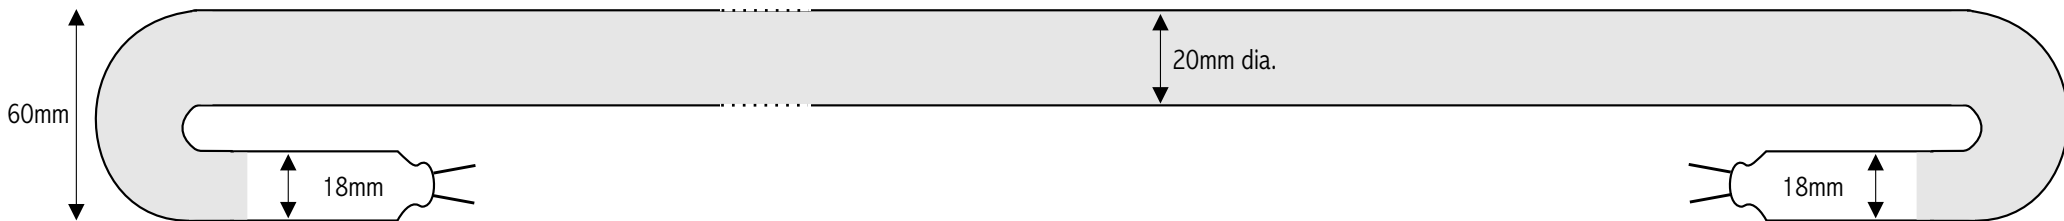

TIME Luminaries sdn bhd

#01-1B, Jln Hilir 1, Tmn Angsana Hilir
55100 Kuala Lumpur Malaysia
Tel : +603-92829096 Fax : +603-92825875
<http://www.neon-lighting.com>

Cold Cathode Luminaire detail - L2 (electronic)

Accessories : 100ma electronic transformer MAXI 2500 (Italy), silicone HT cable (flame retardant) and silicone encapsulated electrodes.

Lamp size : 20mm diameter tubes with 18mm diameter nickel electrode
Gas pressure 7.5mm/Hg. Color = masonlite WarmWhite 3000K (1150 Lumens per meter)